

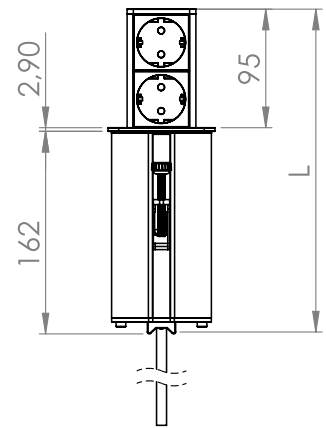
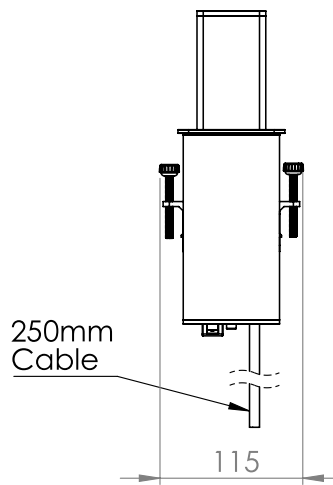




DIGITel
within easy reach

POP UP

push and plug

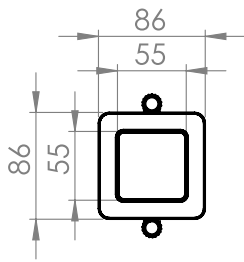

POWER CHARACTERISTICS:

Voltage: 250V
Amperage: 16A
Power connector: Cable HO5VV - F, 3x1,5mm²
 EPN 1104/EPN 1114 (Wieland m/f) - 250mm
Frequency: 50-60Hz
Temperature: 0 – 40°C
Relative Humidity: 0 – 95°C (no condensing)
Protection: IP 44

MOUNTING

Mounting is achieved by snapping holders in the device slots, and then tightening with provided Alan key - it can accommodate a desk thickness of between 10mm and 50mm.

DIMENSION:

L = od 95 do 257mm

COLOR

Black
White



Power outlet (Schuko) 45x45



Power outlet (IT)



Power outlet (UK) 45x45



USB charger 4A 2-ports



Power outlet (CH) 45x45



Power outlet (USA) 45x45



Power outlet (DK) 45x45



Power outlet Universal 45x45



Power outlet (FR) 45x45



RJ45 Cat6